
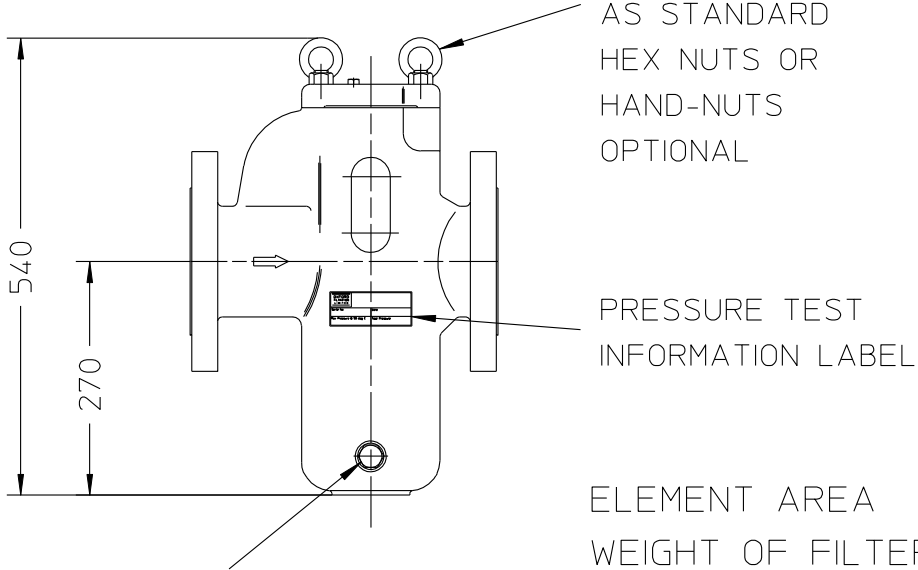


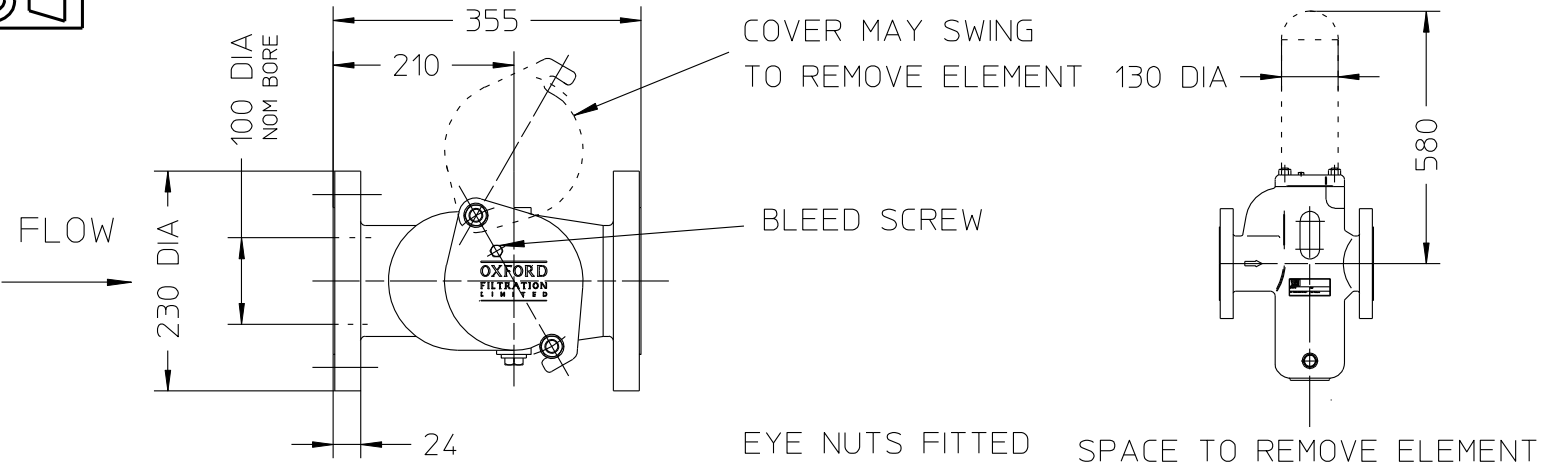

1/2" DRAIN MAY
BE ON OTHER SIDE

EYE NUTS FITTED AS STANDARD
HEX NUTS OR HAND-NUTS OPTIONAL

SPACE TO REMOVE ELEMENT

FLANGE TYPE	
REQUIREMENTS	
P.C.D OF HOLES	
DIA OF R/F	
R/F THICKNESS	
NO OF HOLES	
DIA OF HOLES	

- ELEMENT AREA - 1020cm²
- WEIGHT OF FILTER - 48 kg
- MAX WORKING PRESSURE - 16 bar (CAST IRON)
- TEST PRESSURE - 24 bar

UNLESS SPECIFIED GENERAL TOLERANCE 0 DEC PLACE +/- 1 1 DEC PLACE +/- 0.4 2 DEC PLACE +/- 1.0 ANGULAR +/- 2 Deg	APPROVED	MATERIAL	DESCRIPTION GENERAL ARRANGEMENT DN100 Fig Single Filter		
	DRAWN A.S.N.				
MODIFICATION DRAIN WAS UNDER INLET	DATE 10/3/04	C 2004 This drawing and the design is the property of OXFORD FILTRATION LIMITED and may not be copied or used for any purpose other than that for which it was supplied unless expressly stated in writing		DRG NO. 12066	ISS 3