



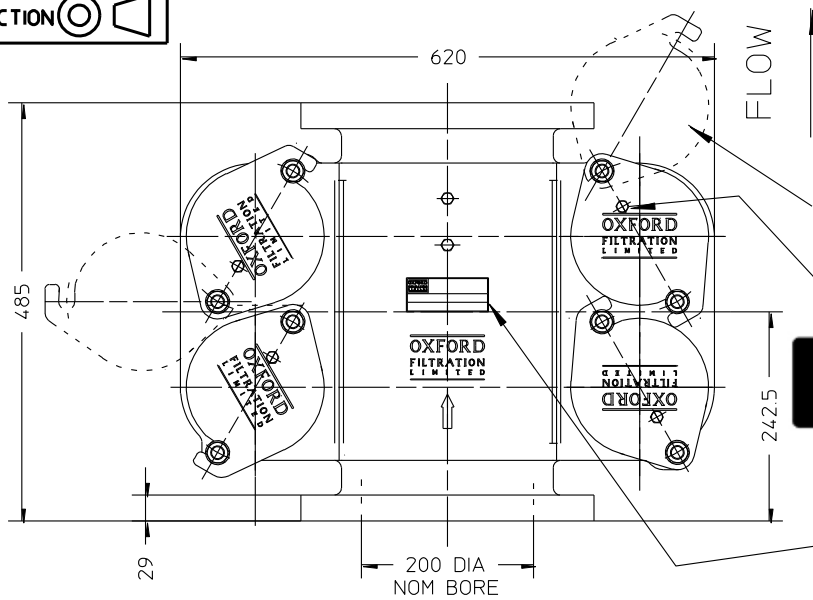


COVER MAY SWING
TO REMOVE ELEMENT

BLEED SCREW

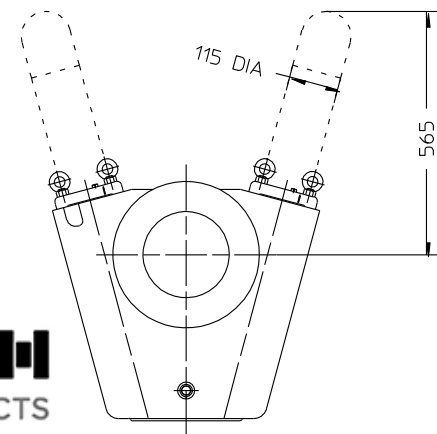

SPACE TO REMOVE ELEMENT

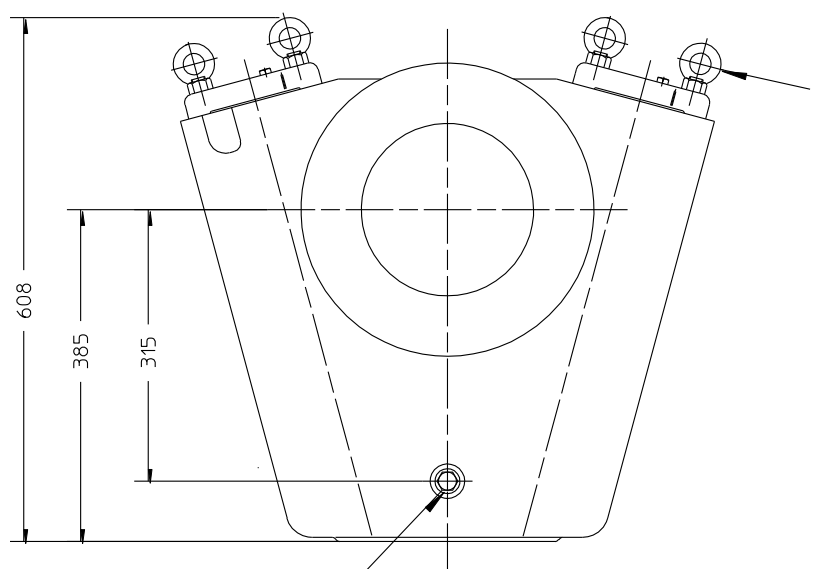

EYE NUTS FITTED
AS STANDARD
HEX NUTS OR
HAND-NUTS
OPTIONAL

ELEMENT AREA

WEIGHT OF FILTER

MAX WORKING PRESSURE

TEST PRESSURE

FLANGE TYPE REQUIREMENTS	
P.C.D OF HOLES	
DIA OF R/F	
R/F THICKNESS	
NO OF HOLES	
DIA OF HOLES	

- 4076cm²
- 170 kg
- 10 bar
- 15 bar

1/2" DRAIN MAY
BE ON OTHER SIDE

ALL DIMENSIONS NOMINAL

UNLESS SPECIFIED GENERAL TOLERANCE 0 DEC PLACE +/- 1 1 DEC PLACE +/- 0.4 2 DEC PLACE +/- 1.0 ANGULAR +/- 2 Deg	APPROVED	MATERIAL	DESCRIPTION GENERAL ARRANGEMENT DN200 Fig Single Filter	
	DRAWN A.S.N.	OXFORD FILTRATION LIMITED		
MODIFICATION	DATE 16/12/16	C 2016 This drawing and the design is the property of OXFORD FILTRATION LIMITED and may not be copied or used for any purpose other than that for which it was supplied unless expressly stated in writing	DRG NO. 12583PN10	ISS 1